



# JOHNSTONE SUPPLY

Your HVACR Source



## Hot HVACR Savings for the Dog Days of August

Buy R410A Refrigerant,  
Get a FREE Manifold!

SPECIAL OFFER



H26-733

Purchase five cylinders of Honeywell Genetron® R410A-25 lb. at one time during the month of August and receive a **FREE** JB Industries manifold M2-5-410A (H26-733).

A \$69.99 value. Offer expires Aug. 31, 2011. At participating Johnstone Supply locations only. See store for details.

### Vertical Condensate Pump

- Thermally protected motor and stainless steel shaft
- 22' maximum lift
- Volts: 115

**29<sup>99</sup>**

B82-895  
Mfg. #CP-22



### Heat Pump Filter-Drier

Hot Deal

- Internal check valve
- Conn. Size: 3/8" ODF
- Cu. In.: 5
- R22/R410A Capacity: 5.0



**26<sup>99</sup>**  
B12-291  
Mfg. #BFK-163S

### Low Pressure Control

- Pressure Range PSIG: 20" to 100
- Diff. PSIG: 7 to 50
- Switch Action: SPST Close High/Open Low
- Switch Action: SPST Close High/Open Low

**49<sup>99</sup>**

B11-561  
Mfg. #P70AB-2C



### LightStar180 LED Flashlight



- Bright 180 lumen LED
- Includes nylon holster, clip and wrist strap



**19<sup>99</sup>**  
G35-183  
Mfg. #TLF-3C2AA

### Emerson Rescue™ Direct Drive Blower Motor

- 48 frame, 2 speed, 1075 RPM, ball bearing, all-angle mounting
- Diam.: 5-5/8"
- HP: 1/3-1/6
- Volts: 208-230

**69<sup>99</sup>**

S89-095  
Mfg. #5462



\*Visit [www.emersonclimaterewards.com](http://www.emersonclimaterewards.com) for details.

Prices Valid August 1-31, 2011



### Direct-Acting Solenoid Valve

- Port Size: 7/64"
- Conn. Size: 3/8" ODF
- R22 Capacity: 1.27 Tons
- Valve and coil sold separately



**24<sup>99</sup>**  
 B12-235  
 Mfg. #100RB2S3

### Sight Glass

- Dual access valves
- Compatible with all CFC, HCFC and HFC refrigerants
- Conn. Size: 3/8" ODF



**12<sup>99</sup>**  
 B12-461  
 Mfg. #HMI-1TT3

### 5-2-1 Compressor Saver™

- Prewired potential relay and start capacitor
- Instant restart
- 2-year warranty exchange



**22<sup>99</sup>**  
 B16-902

Order #	Mfg. #	Volts	HP	Compressor	Price
B16-902	CSR-U1	420	1-2-3 Ton	Scroll/Reciprocating	22.99
B16-903	CSR-U2	420	3.5-4-5 Ton	Scroll/Reciprocating	29.99

### Commercial Defrost Timer



- 1 to 6 defrost cycles per day, 4 hours between cycles
- Heavy-duty synchronous industrial type motor and steel enclosure
- Volts: 120
- Switch Action: 1 N.C.–1 N.O.
- Off-Cycle Defrost



**74<sup>99</sup>**  
 G21-503  
 Mfg. #8045-00

### Aluminum Foil Butyl Tape

- Roll mastic
- Aluminum Foil/Butyl
- Size In. x Yds.: 2.0 x 100
- Approval/Listed: UL 181B-FX Printed



**15<sup>99</sup>**  
 G80-301  
 Mfg. #SF-686



### Solenoid Valve Coil

- UL listed; CSA approved
- 120V



**25<sup>99</sup>**  
 B12-311  
 Mfg. #AMG-120

### 7.5" Duct Ties

- UV Resistant
- Package of 100



**1<sup>89</sup>**  
 G22-854

### 70 Series™ Single Stage Thermostat

White  
 Rodgers

- System Application: Heat/Cool/Heat Pump
- Stages Heat/Cool: 2/1
- Power Method: Hardwired



**34<sup>99</sup>**  
 L39-038  
 Mfg. #1F79-111



\*Visit [www.emersonclimaterewards.com](http://www.emersonclimaterewards.com) for details.

### Portable Air Conditioner



- Electronic controls with soft-touch keypad
- Full feature remote control
- 24-hour on/off timer
- Fan only mode, three cooling, three fan speeds
- BtuH Cooling: 9,000
- EER: 8.98
- Air Delivery CFM: 342



**389<sup>00</sup>**  
 B72-549  
 Mfg. #PS-91B

Summer Savings

## Digital Sling Psychrometer

- Dual display
- Dew point and wet bulb calculation

**92<sup>99</sup>**

H25-451  
Mfg. #THWD-3



**AMPROBE**

**New**

## Electric Dehumidifier

- Built-in drain pump
- Removable condensate bucket
- Set humidity level from 30% to 90%
- 24 hour on/off timer
- 2-speed fan
- Capacity: 70 Pints

**229<sup>00</sup>**

B72-427  
Mfg. #D70D



FRIEDRICH  
1883



LEARN MORE AT  
energystar.gov

## Insulation Tester/ Megohmmeter

- Measures insulation values up to 1,000 megohms at 500V and indicates the condition of insulation on the zone scale
- Uses 2 C batteries (not included)

**99<sup>99</sup>**

H25-705  
Mfg. #M500



**Supco**

## 3-Speed Direct Drive Blower Motor

- 48 frame, 3-speed, 1075 RPM, sleeve bearing, all-angle mounting
- Diam.: 5-5/8"
- HP: 1/3
- Volts: 115

**64<sup>99</sup>**

S88-538  
Mfg. #DL1036



**ACSmith**

## Cordless Pipe Clamp

- Can be used on pipes with diameters of 1/4" to 1-3/8"
- Includes retractable general purpose puncture probe
- Range: -20°F to +300°F

**89<sup>99</sup>**

H26-325  
Mfg. #40051J



**Cooper  
ATKINS**

## Water Regulating Valve

- 30" capillary with 1/4" flare nut
- Connection Type: Threaded (IPS)
- PSI Range: 70-260 PSI



**Johnson  
Controls**

**89<sup>99</sup>**

B10-840  
Mfg. #V46AA-1C

## SWOOSH CO<sup>2</sup> Cartridges

- 800 PSI
- Fits Gallo Gun
- 12-pk.



**DIVERSITECH**

**17<sup>99</sup>**

H26-165  
Mfg. #GGC-12

## Abrasive Cloth

- Cleans and polishes metal surfaces
- 1-1/2" x 10'



**2<sup>99</sup>**

R53-616

## R22/R404A/R410A Manifold

- 2-valve, forged brass body
- Includes three 60" hoses
- 2-1/2" glow-in-the-dark gauges



**JB  
JUST BETTER**

**69<sup>99</sup>**

H26-733  
Mfg. #M2-5-410A

## Foam and Fill Expanding Foam

- Triple expanding polyurethane
- 12 oz.



**Red Devil**

**4<sup>19</sup>**

G80-186  
Mfg. #Mfg. # 0909

## TrueDRY Dehumidifier

- With fresh air ventilation
- 90 pints per day capacity
- 120V, 200CFM



**Honeywell**

**1269<sup>00</sup>**

B96-526  
Mfg. #DR90A1000

Summer Savings



### Condenser Fan Motor

- 48 frame, 1 speed, 1075 RPM, sleeve bearings, all-angle mounting
- Diam.: 5-5/8"
- HP: 1/4
- Volts: 208-230

**59<sup>99</sup>**

S88-501  
Mfg. #1860



\*Visit [www.emersonclimaterewards.com](http://www.emersonclimaterewards.com) for details.

### Condenser Fan Motor

- 48 frame, 1 speed, 825 RPM, SAB bearings, all-angle mounting
- Diam.: 5-5/8"
- HP: 1/4-1/8
- Volts: 208-230

**89<sup>79</sup>**

S89-127  
Mfg. #1874



\*Visit [www.emersonclimaterewards.com](http://www.emersonclimaterewards.com) for details.

### Torsion Type Flexible Mount Bracket

- Fits 5" or 5.5" motor diameter and 9" or 10" mounting centers



**17<sup>99</sup>**  
S58-703

### Disconnect Switch

- 60A fused heavy-duty disconnects



**10<sup>99</sup>**  
G89-733  
Mfg. #DPF222R

### 48 Frame Condenser Fan Motor

- 1/2 HP, 1 speed, 48 frame, 1075 RPM, 460V, ball bearings, all-angle mounting



**189<sup>99</sup>**  
S88-995  
Mfg. #3738

### 56 Frame General Purpose Motor

- 3 HP, 1 speed, 56 frame, 1800 RPM, 460/200-230V, ball bearings, open drip proof rigid mounting



**299<sup>00</sup>**  
S89-570  
Mfg. #H887

### Outdoor Safety Switch

- Fused 60A three-phase NEMA 3R rated



**149<sup>99</sup>**  
G80-046  
Mfg. #GF322NR

### Noalox® Anti-Oxidant Compound

- Reduces galling and seizing and promotes good ground continuity on aluminum conduit joints
- Improves service life of aluminum



**7<sup>99</sup>**  
G32-383  
Mfg. #30-2090

### 3-Pole Definite Purpose Contactor

- 3-pole, 24V coil, 30A



**21<sup>99</sup>**  
L36-687  
Mfg. #C25DND330T

### Ventilation And Refrigeration Universal Motor Kit

- Includes 4" and 5-1/2" fan blades, mounting brackets, 1/4" and 5/16" shaft adapter and hub adapter



**12<sup>98</sup>**  
S58-464  
Mfg. #65670

### Turbo™ 200X Universal Replacement Capacitor


- Permanent replacement capacitor
- 5 year limited warranty
- Mfd: 70.0 to 97.5
- Volts: 370VAC or 440VAC



**64<sup>99</sup>**  
G33-037  
Mfg. #12300

### Consolidator Condenser Fan Motor with F Type Insulation

- 48 frame, 2 speed, 1075 RPM, ball bearing, all-angle mounting
- Diam.: 5-5/8"
- HP: 1/3-1/6
- Volts: 208-230

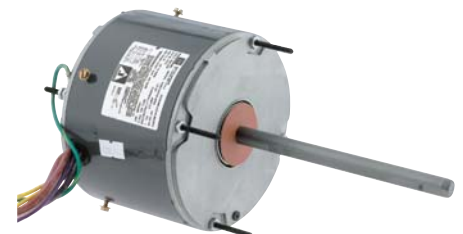

**69<sup>99</sup>**  
S81-012  
Mfg. #5458H

## ZRK5 Scroll Compressors



- Copeland ZRK5 models cover R-22 applications with system capacities from 1.5 to 5 tons
- Better product availability
- Easy installation
- Simplified compressor selection
- Quiet, reliable operation
- Copeland Scroll ZRK5 compressors includes molded plug wiring harness, and mounting parts in every box



## Pro-Flush HVAC Flushing Solvent

- For R-410A retrofits, refrigerant conversions and compressor burn-outs
- A single can treats 5–8 tons



**95<sup>99</sup>**

B84-454

Order #	Mfg. #	Description	Price
B84-454	PF-KIT	Pro-Flush HVAC Flush Kit	95.99
B84-455	PF-16	Pro-Flush 16 oz. Flushing Solvent Refill	49.99

## Acid-Away<sup>®</sup>

- Effectively removes acid buildup that occurs in refrigeration oils used in air conditioning and refrigeration systems
- Safe and easy to use treatment



**15<sup>99</sup>**

B12-007

Order #	Mfg. #	Description	Price
B12-007	45004	For use with mineral or alkylbenzene oils	15.99
B13-641	45009	For use with systems Polyolester oils	16.99

## EK Series Liquid Line Filter-Driers

- Specially formulated desiccant blend
- Compatible with CFC, HCFC and HFC refrigerants



**11<sup>99</sup>**

B12-260

Order #	Mfg. #	Conn. Size	Cubic Inches	R22/R410A Capacity	Price
B12-260	EK-083S	3/8" ODF	8	5.0	11.99
B12-266	EK-163S	3/8" ODF	16	5.0	14.99

## New Super Seal HVACR<sup>™</sup>

- All refrigerants compatible
- Seals up to 5 ton systems
- Environmentally friendly




**39<sup>99</sup>**

B82-786  
Mfg. #944KIT

## QwikLug<sup>™</sup> Compressor Terminal Kit

- 3 screw-tight connectors and wire nuts
- Wire Gauge: 10
- Lead Length 4'



**25<sup>99</sup>**

G32-265  
Mfg. #QT2910

## Ratcheting Tube Bender

- Bends 1/4" to 7/8"
- Includes reamer and tube cutter



**124<sup>99</sup>**

H85-528  
Mfg. #60331

## Silvabraz

- For copper to copper
- Self-fluxing
- 1 to 2% Silver
- 1 lb.



**25<sup>99</sup>**

R53-646

## Silver Brazing Flux

- For high-temperature brazing (effective to 1600°F)
- 7 oz. brush top container



**4<sup>99</sup>**

R53-410

## Thermo-Trap<sup>®</sup>

- Protects material from heat generated by soldering, welding, or brazing
- 11 oz. paste



**8<sup>49</sup>**

R53-391  
Mfg. #4371-36

## SFD Series Suction Line Filter-Driers

- Dual access valves to check pressure drop
- Compatible with all CFC, HCFC and HFC refrigerants



**26<sup>99</sup>**

B12-522

Order #	Mfg. #	Conn. Size	Cubic Inches	R22/R410A Capacity	Price
B12-522	SFD13S6-V V	3/4" ODF	13	6.4	26.99
B12-523	SFD13S7-V V	7/8" ODF	13	7.2	27.99



### The Digital Round® Thermostat

Honeywell

- For conventional systems and heat pumps with no auxiliary heat
- Manual changeover
- One-touch backlit display
- System Application: Heat/Cool
- Stages Heat/Cool: 1/1
- Power Method: Powerstealing



**34<sup>99</sup>**  
 L40-112  
 Mfg. #T8775C1005

### Media Air Cleaner Media

Honeywell

- Fits F100F series media air cleaners



**19<sup>99</sup>**  
 L86-468

Order #	Mfg. #	Description	MERV Rating	Price
L86-468	FC100A1029	16" x 25" Replacement Filter	10	19.99
L86-469	FC100A1037	20" x 25" Replacement Filter	10	19.99

### VisionPro® IAQ Home Comfort System

Honeywell

- Controls temperature, humidification, dehumidification and ventilation
- System Application: Heat/Cool or Heat Pump w/Auxiliary Heat
- Stages Heat/Cool: 4/2
- Power Method: Hardwired



**188<sup>99</sup>**  
 L44-377  
 Mfg. #YTH9421C1010

### Universal Thermostat Guard

Honeywell

- Clear cover and base, and opaque wallplate
- Height: 5-1/16"
- Width: 6-1/16"



**15<sup>99</sup>**  
 L37-548  
 Mfg. #TG511A1000

### Dual Pressure Control



- Suitable for most refrigerants
- Lockout requires manual reset
- Include 36" capillary with 1/4" flare nut



**99<sup>99</sup>**  
 B11-566  
 Mfg. #P70MA-1C

### Delay On Break Timer



- Simple 2-wire hookup
- Solid state reliability
- Input: 18 to 240VAC/VDC; output: SPST N.O. 1.5A, 15A in-rush
- Time delay: Repeat accuracy ±2%
- Range: 0.3 to 10 minutes



**4<sup>49</sup>**  
 B11-835  
 Mfg. #ICM203B

### Enclosed Fan Relay



- RBM Type 84
- SPDT
- Coil voltage 24VAC



**5<sup>99</sup>**  
 L36-905  
 Mfg. #90-293Q

Qualifies for 1 First Choice Reward Point.  
 Visit [www.emersonclimaterewards.com](http://www.emersonclimaterewards.com) for details.



### New Mechanical Temperature Controls



- Controls refrigeration, industrial heating/cooling or staged heat/cool/ventillation systems
- Rugged, weather resistant enclosure
- Large, visible dial
- Tolerates moist conditions



**29<sup>99</sup>**  
 L45-665

Order #	Mfg. #	Switch Action	Temp. Range	Diff.	Price
L45-665	TF115-001	SPDT	40°F to 110°F	Fixed 3F	29.99
L45-666	TF115-023	SPDT	-30°F to 110°F	Fixed 6F	44.99
L45-667	TH109-009	2-SPDT	40°F to 110°F	3*/stage	62.99
L45-668	TRF115-005	SPDT	0°F to 120°F	Fixed 3F	49.99

## 10 CFM Platinum Series Vacuum Pump

- 2-stage pump with 15 micron rating
- Includes blank-off valve and check valve
- Made in the USA

**579<sup>99</sup>**

H93-072  
Mfg. #DV-285N



## Limited Edition 7 CFM SS7 Series Vacuum Pump

- Up to 20% faster than other 7 CFM units
- 1/2" intake port
- Made in the USA

**399<sup>99</sup>**

Q51-630  
Mfg. #DV-200N-SSBL



## Supernova Digital Vacuum Gauge

- Measures in microns, PSI, inHg, Pascal, Torr, mTorr and mBar
- Programmable alarm, shut-off and backlight
- Accurate from 12,000 microns down to 10 microns
- Includes case and AC adapter

**179<sup>99</sup>**

H27-110  
Mfg. #DV-41



Available while quantities last

## Refrigerant Recovery Unit

- Recovers all CFC, HFC and HCFC refrigerants including R410A
- Only 28 lbs.

**559<sup>00</sup>**

H93-131  
Mfg. #RG6000



## New R22/R410A/R407C Heat Pump Manifold

- 2-valve, forged brass body
- Two 800 PSI gauges for heat pump applications
- Includes three 60" hoses
- Large 3-1/8" gauges

**79<sup>99</sup>**

H27-156  
Mfg. #42044



## Electronic Refrigerant Scale

- 110 lb. capacity
- Accuracy: ±0.5% of reading

**139<sup>99</sup>**

H25-270  
Mfg. #TIF9010A



## R22/R404A/R410A Manifold

- 4-valve, aluminum body
- Includes four 60" hoses
- Large 3-1/8" gauges

**149<sup>99</sup>**

H26-499  
Mfg. #49967



## Refrigeration System Analyzers

- Fast and accurate diagnostics on all AC/R systems
- 2 temperature probe inputs for simultaneous real-time calculation of superheat and subcooling
- Includes 2 pipe clamp probes, batteries, calibration protocol and hard case
- H85-610 is a 4-valve manifold with built-in vacuum gauge



**359<sup>99</sup>**  
H85-592

Order #	Mfg. #	Description	Price
H85-592	0563-5506	550-2 Refrigeration System Analyzer Kit	359.99
H85-610	0563-5572	557 Refrigeration System Analyzer Kit w/ Vacuum Gauge	472.99

## D-Tek Select Infrared Leak Detector

- 0.10 oz./year sensitivity
- Automatic zeroing

**332<sup>99</sup>**  
H85-436  
Mfg. #712-202-G1



INFICON

## Informant 2 Dual Purpose Refrigerant & Combustible Gas Leak Detector

- Refrigerant sensitivity: 0.25 oz./yr.
- Combustible gas sensitivity: 50 PPM

**299<sup>99</sup>**  
H85-388  
Mfg. #19-8038




BACHARACH



## Digital Pressure and Temperature Chart

- Fast and accurate P/T references for over 60 refrigerants
- 5.1 to 462.5 PSI, 0.35 to 31.88 bar, 0.035 to 3.188 Mpa

**29<sup>99</sup>**  
H26-667  
Mfg. #69096

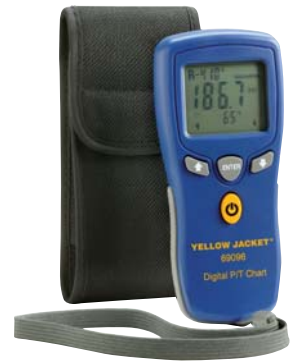

## Single Test Gauges

- Quick pressure checks for recovery tanks
- Use low or high side gauge with quick coupler to attach directly to system or tanks



**16<sup>49</sup>**  
H26-713

Order #	Mfg. #	Description	Price
H26-713	40331	Red Pressure Gauge w/ Quick Coupler	16.49
H26-714	40332	Blue Compound Gauge w/ Quick Coupler	18.49

## Optimax Jr™ Leak Detection Kits

- For small to medium systems
- H26-479 includes flashlight, dye injector assembly, hose assembly with low-loss fitting, purge fitting, 2 universal/polyolester dye cartridges, dye cleaner, fluorescence-enhancing glasses and carrying case
- H27-004 includes flashlight, bleed valve and purge capsule, hose assembly with low-loss fitting, purge fitting, 4 universal/polyolester dye GLO-STICK® capsules, dye cleaner, fluorescence-enhancing glasses and carrying case

SPECTRONICS CORPORATION



H26-479



H27-004

**96<sup>99</sup>**  
H26-479

Order #	Mfg. #	Description	Price
H26-479	OPK-50EZ/E	EZ-Ject Leak Detector Kit	96.99
H27-004	OPK-50GS/E	GLO-STICK Leak Detector Kit	96.99



## G2 Phoenix Clamp Meter

- Dual backlit display
- Built-in worklight
- Manual ranging
- Detachable head for use with accessory heads

**89<sup>99</sup>**

H26-493  
Mfg. #DL379



## HVAC Multimeter

- Compact True-RMS meter for HVAC troubleshooting
- Includes built-in thermometer and microamp measurement for flame sensors
- Large backlit display for poorly lit areas
- Includes battery, holster, test leads and 80BK integrated thermocouple probe

**149<sup>99</sup>**

H25-748  
Mfg. #116



## Folding Pocket Thermometer

- Fold-out stainless steel temperature probe
- Exposed tip provides accurate readings even when closed
- Built-in magnetic mount
- Range: -58°F to +572°F

**10<sup>99</sup>**

H27-032  
Mfg. #PDT650



## Stick Meter

- Designed for 1-hand testing
- Manual ranging
- Connects to Fieldpiece accessory heads

**109<sup>99</sup>**

H26-143  
Mfg. #HS33



## Swivel Head Clamp Meter

- 180° swivel-head allows for easy viewing at any angle
- True-RMS
- Dual backlit display
- Built-in LED worklight
- Manual or autoranging
- Detachable head for use with accessory heads

**164<sup>99</sup>**

H27-090  
Mfg. #SC56



## Pipe-Clamp Thermocouple

- Perfect for superheat and subcooling measurements
- Temperature range: -50° to 257°F
- Type: K
- 3/8" to 1-3/8" Pipe Clamp

**44<sup>99</sup>**

H25-894  
Mfg. #ATC1





### Digital Airflow Meter

- Measures air velocity, temperature and humidity
- Calculates CFM, wet bulb and dew point
- Large LCD digital display

# 129<sup>99</sup>

H26-475  
Mfg. #DAFM3



### Compact Thermal Imager

- Easy-to-use troubleshooting tool
- Scan an entire area to quickly identify repair or replacement opportunities
- 2.8" display with 120 x 120 pixel resolution
- Temp. Range: -4°F to +482°F

# 1995<sup>00</sup>

H27-007  
Mfg. #FLIR i7



### Temperature/Humidity USB Data Logger

- Logs 32,000 data points (16,000 temperature and 16,000 relative humidity)
- Includes analysis software

# 69<sup>99</sup>

H26-772  
Mfg. #THL2



### **New** Micro CA-100 Inspection Camera

- Easily perform visual inspections in hard-to-reach areas
- 3.5" high resolution color LCD (320 x 240 resolution)
- 17mm camera head diameter with 4 adjustable LEDs

# 219<sup>99</sup>

H85-609  
Mfg. #36738



### Wireless Inspection Camera

- Detachable wireless color display can be viewed up to 32 feet from measurement point
- 3.5" display (320 x 240 pixels)
- 17mm camera head

# 199<sup>99</sup>

H27-058  
Mfg. #BR200



### **New** Dual Range Non-Contact Voltage Tester

- Automatically detects low and high voltage (12-1000VAC)
- Auto power-off

# 14<sup>99</sup>

H27-154  
Mfg. #NCVT-2



New

## Bucket Descaler



- Eliminates limescale and other deposits from tankless and standard water heaters
- Simply attach to water in/out and circulate with SpeedyBright descaler
- Includes bucket, 2 hoses and powerhead assembly



# 299<sup>99</sup>

W89-881



Order #	Mfg. #	Description	Price
W89-881	SC-DS-5	BucketDescaler	299.99
B84-493	SPDYBRT-CS	SpeedyBright Descaler (1/2 Gallon)	22.99

## Nitrogen Regulator



- Brass forged body
- 1/4" flare outlet fittings
- Fits all nitrogen tanks

# 39<sup>99</sup>

H26-212  
Mfg. #RHP400



## Nitrogen Flowmeter



- While brazing, a float ball indicates low nitrogen pressure when purging copper lines
- Attaches directly to any nitrogen regulator with a 1/4" male outlet fitting

# 39<sup>99</sup>

H26-625  
Mfg. #UNF3



## BucketVac



- Turns any standard five-gallon bucket into a commercial grade wet/dry vacuum
- Snap and go installation
- Change from wet to dry pickup with no mess by simply using a different bucket

# 79<sup>99</sup>

X92-592  
Mfg. #BV-5-JS



## Electric Heat Blo-Gun



- Defrosts, thaws, dries, softens and heat seals
- Temperature range 750°F to 1,000°F
- 1,680W and 5,700 BTUs

# 54<sup>99</sup>

H85-022  
Mfg. #750



## Portable Torch Kit



- Complete starter kit for soldering and brazing
- Includes self-lighting tips, torch handle, regulator, 12' hose, heat shield, solder and tool bag

# 165<sup>99</sup>

H85-586  
Mfg. #PL-DLXPT



Gas cylinder not included

## Nitrogen Purge Kit



- Complete kit to pressure check and purge lines before brazing
- Includes nitrogen regulator, turbo tornado, 1/2" cone plug, 3/4" cone plug, needle tip, CO<sup>2</sup> adapter, 36" x 1/4" hose, 72" x 1/4" hose and blow gun

# 149<sup>99</sup>

H85-585  
Mfg. #NPK-TT



Test Instruments & Tools



### Drive-A-Matic Adjustable Nut Driver

- Automatically fits 15 different nut and screw sizes
- Hex head adjusts to the proper size as you turn it
- Cushion grip handle

**24<sup>99</sup>**

H26-756  
Mfg. #632



### 7-Piece Magnetic Tip Nut Driver Set

- Includes 3/16", 1/4", 5/16", 11/32", 3/8", 7/16" and 1/2"
- Cushion grip handles

**54<sup>99</sup>**

H26-636  
Mfg. #631M



### 11-In-1 Screwdriver

- Includes Schrader valve core removal tool and threader tip
- Cushion grip handle

**13<sup>49</sup>**

H27-026  
Mfg. #32527



### 10-in-1 Folding Screwdriver/Nut Driver

- Folding pocket-style tool with 8 screwdriver sizes and 2 nut drivers
- Unfolds and locks to provide a straight screwdriver/nut driver

**18<sup>99</sup>**

H27-057  
Mfg. #32535



### 4-Piece Mini Screwdriver Set

- 3/32" and 1/8" cabinet, 1/16" keystone, #0 Phillips
- Cushion grip handles

**17<sup>99</sup>**

H26-637  
Mfg. #85484



### Magnetic Screwdriver with 32-Piece Tamperproof Bit Set

- Sturdy bit and screw holding magnet keeps screws securely in place
- Cushion grip handle
- Includes 1/4" square to 1/4" hex adapter to drive sockets

**19<sup>99</sup>**

H26-750  
Mfg. #32510



### 4-in-1 Stubby Screwdriver

- Includes #1 and #2 Phillips, 3/16" and 1/4" double-end slotted bits
- Only 3" long

**2<sup>99</sup>**

H24-807  
Mfg. #DA78140



### Magnetic Hex Drivers

- 1/4" hex shank with quick release groove
- Strong rare earth magnets for maximum holding
- 1-3/4" overall length

**4<sup>99</sup>**

H27-097



Order #	Mfg. #	Description	Price
H27-097	86600	1/4" Magnetic Hex Drivers (3-Pk.)	4.99
H27-098	86601	5/16" Magnetic Hex Drivers (3-Pk.)	4.99
H27-099	86602	3/8" Magnetic Hex Drivers (3-Pk.)	4.99

## 7-Piece 180° Pivot Head Ratcheting Combination Wrench Set

- Ratcheting box end pivots a full 180° allowing maximum leverage
- Includes: 5/16", 3/8", 7/16", 1/2", 9/16", 5/8" and 3/4"

**64<sup>99</sup>**

H26-266  
Mfg. #FRP7



**Crescent**

## 170-Pc. Professional Tool Set

- Includes standard and deep sockets, wrenches, pliers, screwdrivers, hex keys and more
- Quick-release ratcheting drives
- Folding case for easy storage

**89<sup>99</sup>**

H85-517  
Mfg. #CTK170MP



**Crescent**



Test Instruments & Tools

## Reversible Ratcheting Combination Wrench Set

- Rapid reverse with the push of a button
- Includes 5/16", 3/8", 7/16", 1/2", 9/16", 5/8" and 3/4"

**49<sup>99</sup>**

H85-372  
Mfg. #FRR7



**Crescent**

## Wide Opening Adjustable Wrenches

- Non-slip cushion grip
- Wide handle for greater comfort and reduced fatigue
- Hex jaw designed for reduced slippage



**Crescent**

**11<sup>99</sup>**

H26-928

Order #	Mfg. #	Size	Capacity	Price
H26-928	AC14CV	4"	1/2"	11.99
H26-929	AC16CV	6"	15/16"	12.49
H26-930	AC18CV	8"	1-1/8"	12.99
H26-931	AC110CV	10"	1-5/16"	15.99
H26-932	AC112CV	12"	1-1/2"	22.99

**New**

## 21-Piece 3/8" Drive Socket Set

**GEARWRENCH**

- Long handle for added leverage with low profile head for better access
- 12-point standard sockets and 6-point deep sockets

**46<sup>99</sup>**

H27-174  
Mfg. #80557



**New**

## 16" Indexing Pry Bar

**GEARWRENCH**

- Indexing to 180° for greater leverage
- 14 locking positions for easy access

**29<sup>99</sup>**

H85-615  
Mfg. #82216





### New Cobra Pliers

- Self-gripping on pipes and nuts
- Pushbutton action for single-handed adjustment
- Comfort grip handles
- Size: 10"
- Capacity: 1/8" to 2"

**26<sup>99</sup>**  
**H27-123**  
 Mfg. #8702250SBA



### 3-Piece Alligator® Pliers Set

- Self-gripping on pipes and nuts
- 7-position adjustment
- Size: Set of 7", 10" & 12"
- Capacity: 1/8" to 2-3/4"

**56<sup>99</sup>**  
**H26-893**  
 Mfg. #002007S1



### Auto Adjusting Pliers

- Box joint construction
- Automatically adjusts by simply squeezing the handle
- Self-gripping on pipes and nuts
- Size: 10"
- Capacity: 1/8" to 1-1/4"

**39<sup>99</sup>**  
**H26-898**  
 Mfg. #8501250SBA



### 6-1/4" Multi-Function Long Nose Pliers

- Includes a cutter, stripper and crimper in one tool
- Strips 10 to 14 AWG wire cleanly and easily
- Cuts, bends and grips wire
- Crimps standard wire terminals

**26<sup>99</sup>**  
**H26-635**  
 Mfg. #1301614SBA



### Lighted Inspection Mirror

- 2 LEDs illuminate inspection area
- Double ball joints adjust to any angle
- Versa-Grip™ handle for comfort and control
- Extends to 33"

**7<sup>99</sup>**  
**H27-094**  
 Mfg. #80560



### Adapter Set, Gear and Bearing Pullers

- Removes fan blades, blower wheels and bearings
- Cage® to guide jaws for fast set up, solid contact and superior safety

**189<sup>99</sup>**  
**H25-710**



Order #	Mfg. #	Description	Capacity	Max. Reach	Max. Spread	Price
H25-710	HP-2	Six-Piece Hub Puller Adapter Set	5 Tons	4"	1/2"-5"	189.99
H25-104	104	3-Jaw Puller	5 Tons	4"	1/2"-5"	96.99

### Telescoping Magnetic Pickup

- For retrieving steel and iron parts from hard-to-reach areas
- Stainless steel wand extends up to 23-1/2"
- 2 lb. pull

**4<sup>99</sup>**  
**H27-096**  
 Mfg. #383NX



### Outward Cinching Staple Gun

- For fastening insulation around pipes and duct work

**34<sup>99</sup>**  
**H25-435**



Order #	Mfg. #	Description	Pkg. Qty.	Price
H25-435	T50OC	Outward Cinching Staple Gun	—	34.99
H23-904	506	3/8" 10mm Staples	1,250	2.49
H23-905	508	1/2" 12mm Staples	1,250	2.49

## PVC Cutter



- Cuts up to 3/4" PVC and 1-3/8" flexible plastic pipe
- Makes clean burr-free cuts
- Steel handle construction for added strength

**11<sup>99</sup>**

H26-923  
Mfg. #50506



## Serrated Duct Knife



- Double-edged knife with regular and serrated edges
- 5-1/2" blade cuts duct board and flexible duct
- Cushion-grip handle for comfort
- Includes nylon sheath with belt loop

**10<sup>99</sup>**

H27-088  
Mfg. #DK06



## Field Pup Knife



- Diamond textured Kraton handle
- Includes tactical nylon sheath
- Lifetime warranty

**29<sup>99</sup>**

H26-230  
Mfg. #FP3-N



## Twitch Folding Knife



- Pass-through lock with "kick" used to open the blade
- Ambidextrous 1-handed opening
- Lifetime warranty

**34<sup>99</sup>**

H26-997  
Mfg. #TWI-8



## Rotrac Plus Tube Cutter



- Rolling stop to protect cutter wheel
- Lightweight cast aluminum body
- Cuts 1/8" to 1-1/8" OD

**24<sup>99</sup>**

H26-795  
Mfg. #RT70020



## Minicut Tube Cutter



- Large knurled knob for fatigue free pressure control
- 2 guide rollers with recess assist with cutting close to flares
- Cuts 1/8" to 7/8" OD

**13<sup>99</sup>**

H26-799  
Mfg. #RT70105



## PowerLock Multi-Tool



- Exclusive gear-driven compound leverage
- 1-handed flip opening and closing
- 100% stainless steel construction
- Lifetime warranty

**56<sup>99</sup>**

H26-984  
Mfg. #S62-N



## The Quad™ Saw/Driver



- 4 tools in 1: jab saw, keyhole saw, power driver and speed driver
- Keyless quick-change locking chuck accepts both quick-change power bits and standard reciprocating saw blades

**12<sup>99</sup>**

H26-638  
Mfg. #86014



### Hand Seamer

- REDLINE™ ergonomically contoured non-slip handles
- Scaled depth marks on jaws are in 1/4" increments for precise depth bends
- Latch allows for easy open and close with 1 hand

**36<sup>99</sup>**

H26-875  
Mfg. #S2R



*Malco*

### Tensioning Tool

- Attaches nylon ties to flex duct and sheet metal take-offs
- Works on all ties including thin designs
- Comfortable cushion grip handles

**28<sup>99</sup>**

H24-583  
Mfg. #TY4G



*Malco*

### Crimper

- REDLINE™ ergonomically contoured non-slip handles
- Latch allows for easy open and close with 1 hand

**24<sup>99</sup>**

H26-879  
Mfg. #C5R



*Malco*

### Sheet Metal Hole Cutter

- 20 gauge capacity
- Installs on standard electric drill
- Cuts 2" to 12" diameter

**48<sup>99</sup>**

H25-659  
Mfg. #HC1



*Malco*

### Aviation Snips

- Forged steel blades
- Full length "Pinch-to-Point" cut

MIDWEST



H24-225



H24-226



H24-227

**10<sup>99</sup>**

H24-225

Order #	Mfg. #	Cut Type	Cut Length	Capacity	Price
H24-225	P6716-L	Left	1-3/8"	18 Gauge	10.99
H24-226	P6716-R	Right	1-3/8"	18 Gauge	10.99
H24-227	P6716-S	Straight	1-1/2"	18 Gauge	10.99

### Offset Aviation Snips

- Forged steel blades
- Full length "Pinch-to-Point" cut

MIDWEST



H24-508



H24-509

**13<sup>99</sup>**

H24-508

Order #	Mfg. #	Cut Type	Cut Length	Capacity	Price
H24-508	P6510-L	Left	1-1/4"	18 Gauge	13.99
H24-509	P6510-R	Right	1-1/4"	18 Gauge	13.99



## 43-Pocket Tool Carrier

- 2 window pockets, 1 removable and 1 stationary, for easy view of contents
- 7" x 5-1/2" multi-compartment plastic tray included
- 23"L x 12"W x 15"H

**36<sup>99</sup>**

H85-424  
Mfg. #1530



Tools pictured not included

## 58-Pocket Tool Carrier

- 54 Pockets inside and 4 pockets outside
- 18"L x 7"W x 14"H

**46<sup>99</sup>**

H85-509  
Mfg. #1539



Tools pictured not included

## Handyman Gloves

- Padded palm, fingers and knuckles
- Textured fingertip pads provide added abrasion resistance
- Wide elastic cuff



**8<sup>99</sup>**

W69-309

Order #	Mfg. #	Size	Price
W69-309	125M	Medium	8.99
W69-310	125L	Large	8.99
W69-311	125XL	Extra Large	8.99

## Contractor XC Gloves

- Reinforced palm for added abrasion resistance and better grip
- Padded fingers and knuckles for protection
- Full neoprene cuff



**14<sup>99</sup>**

W69-297

Order #	Mfg. #	Size	Price
W69-297	160M	Medium	14.99
W69-298	160L	Large	14.99
W69-299	160XL	Extra Large	14.99

## 21-Pocket Tool Pouch

- Ergonomic rubber handle and padded shoulder strap
- Zippered back pocket for 8" x 5" writing pad

**24<sup>99</sup>**

H26-604  
Mfg. #1509



Tools pictured not included

## 23-Pocket Tool Carrier

- 16 multi-use pockets outside and 7 inside
- 11"L x 10"W x 19"H

**27<sup>99</sup>**

H85-564  
Mfg. #1528



Tools pictured not included

## Tradesman Gloves

- Padded palm, fingers and knuckles
- Flex-Spot™ thumb design for better flexibility
- Full neoprene cuff



**15<sup>99</sup>**

W69-300

Order #	Mfg. #	Size	Price
W69-300	145M	Medium	15.99
W69-301	145L	Large	15.99
W69-302	145XL	Extra Large	15.99

## New Subcontractor Gloves

- Padded palm, fingers and knuckles
- Ring-cut™ feature allows for conversion to a fingerless glove without loss of structural integrity



**10<sup>99</sup>**

W69-496

Order #	Mfg. #	Size	Price
W69-496	130XL	Extra Large	10.99
W69-495	130L	Large	10.99
W69-494	130M	Medium	10.99



## WorkStar80 Rechargeable Work Light



- Super bright, cordless trouble light
- Combination 64 LED work light (4-hour run time) and 16 LED flashlight (12-hour run time)
- Includes AC and DC chargers
- Recharges in 90-minutes

**31<sup>99</sup>**

G80-534  
Mfg. #TLW-80



## New LightStar300 LED Flashlight



- Dual mode (300 or 100 lumens)
- Attached clip, wrist strap and batteries included

**29<sup>99</sup>**

G35-865  
Mfg. #TLF-3002AA-BK



## New LightStar Holster



- Genuine leather holster
- Fits LightStar180 (G35-183) and LightStar300 (G35-865) flashlights

**8<sup>99</sup>**

G35-866  
Mfg. #TLA-H01-LBK



## Nano Light Flashlight



- 100,000-hour LED
- Up to 8 hours runtime
- Easy attaching pocket clip or key ring
- Powered by 4 button cell batteries (included)

**5<sup>49</sup>**

G34-934  
Mfg. #73001



## Stylus Flashlight



- 100,000-hour LED
- Momentary blink or constant on operation
- Powered by 3 AAAA batteries (included)

**10<sup>99</sup>**

G32-705  
Mfg. #65050



## Septor LED Headlamp



- Seven 100,000-hour LEDs
- 90° tilting head
- Adjustable elastic head strap
- Powered by 3 AAA batteries (included)

**25<sup>99</sup>**

G32-793  
Mfg. #61052



## Industrial Batteries



- Alkaline batteries designed for heavy current or continuous use applications

**45¢**

G22-302



G22-302



G21-865

Order #	Mfg. #	Description	Price
G22-302	EN92	AAA Industrial Alkaline	0.45
G21-865	EN91	AA Industrial Alkaline	0.39

## 2-Wire Hard Start

- Uses potential relay with start capacitor
- Works on reciprocating, scroll and rotary compressors
- Mfd: 270 – 324 (Max-Torque)
- HP: 3.5 - 5

**28<sup>99</sup>**

B12-855  
Mfg. #KS1



**Kickstart®**

## Self-Drilling Sheet Metal Screw Kit

- 200 pieces
- 4 popular sizes



**9<sup>99</sup>**  
G32-604



## Woven Duct Strap

- High tensile and abrasion resistant polypropylene
- 1-3/4" x 100'



**DIVERSITECH**

**4<sup>19</sup>**

R54-946  
Mfg. #710-100

## Coil Clean Spray

- Inhibited alkaline detergent
- Heavy-duty foaming
- Self-rinsing
- Corrosion inhibitors
- Size: 18 oz.


**6<sup>49</sup>**

B82-498  
Mfg. #CK20



## Aluminum Foil Scrim Duct Tape

- 3" x 50'




**POLYKEN®**

**10<sup>99</sup>**

G80-151  
Mfg. #338FSK

## Valve Caps

- Brass w/ seal & core wrench
- Pkg. Qty: 25



**C&D VALVE**

**7<sup>49</sup>**

B12-019  
Mfg. #CD2245

## Access Valve Service Kit

- Contains access tees, valve cores, caps, braze-in fittings and core depressor
- High quality components manufactured in the U.S.A.
- Labeled kit is easy to refill

**47<sup>99</sup>**

B17-527  
Mfg. #CD9520



**C&D VALVE**

## Low Profile Condensate Pump

- For limited space application
- includes safety switch and check valve
- 115V
- Shutoff: 20'

**59<sup>99</sup>**

B81-321  
Mfg. #VCC-20ULS



**LittleGIANT**

## Non-Metallic Conduit

- Strong, lightweight, more flexible than metallic liquid-tight
- Strain, corrosion, crush, abrasion resistant
- Can be used for direct burial and concrete encasement

**34<sup>99</sup>**

G89-851



**DIVERSITECH**

Order #	Size	Length	Description	Price
G89-851	1/2"	100'	1/2" Conduit	34.99
G89-852	3/4"	100'	3/4" Conduit	44.99

## Keep Your Competitive Edge!

Visit **JU Online for Contractors**



- Affordable course tuition
- Quick & easy online registration
- Self-paced training
- Selected state CEU's
- NATE CEH's

[www.johnstoneuniversity.com](http://www.johnstoneuniversity.com)



## NXT Gen Condensate Pump

- Includes check valve and external test/run lever
- Volts: 115
- Safety Switch: Yes
- Shutoff: 21'

# 36<sup>49</sup>

B84-444  
Mfg. #VCMX-20ULS



LittleGIANT

## Overflow Cut-Off Switch

- For vertical or horizontal installation
- Enclosed float cannot be obstructed
- 24V, 5A



EZ-TRAP

# 8<sup>99</sup>

B13-549  
Mfg. #EZT-225

## Clear Vinyl Tubing

- Comes in E-Z dispenser box
- 3/8" I.D. x 100'



DIVERSiTECH

# 14<sup>99</sup>

R87-709

## New Waterless In-line Condensate Mini Trap

- For use on gravity drain mini-splits
- Maintains system efficiency by preventing outside air entry through drain tube
- Blocks odors, noise and insects
- Freeze resistant
- 5/8" wide with 9/16" adapter

# 6<sup>99</sup>

B18-107  
Mfg. #EZT-180

EZ-TRAP



## Metal Pan Float Switch

- Fully enclosed float
- Easy to operate test switch
- 24V, 5A, UL 508 tested



AquaGuard

# 6<sup>69</sup>

B16-956  
Mfg. #AG-1100+

## Goliath Drain Pan

- 2.5 times stronger than ABS plastic pans
- 30" x 62" x 3.5"
- Must order B16-961 float switch



AquaGuard

# 51<sup>99</sup>

B98-770  
Mfg. #AG-G 30X62

## Spray Adhesive

- High strength, multi-purpose
- Bonds to both porous & non-porous surfaces
- 12 Oz.



DIVERSiTECH

# 4<sup>79</sup>

G89-755  
Mfg. #315-20

## Scotch Super 33+ Electrical Tape

- Installs in temperatures of 0°F to 220°F
- UV resistant
- 3/4" x 66'



3M

# 4<sup>49</sup>

G21-197

## Vibration Absorption Mounting Pads

- For vibration absorption from HVACR, commercial and industrial equipment
- Composite foam center
- More structurally sound than cork
- Is not affected by oils or chemicals



DIVERSiTECH

# 39¢

R55-602

Order #	Mfg. #	Dimensions L x W x H	Price
R55-602	MP-2E	2" x 2" x 7/8"	0.39
R55-603	MP-3E	3" x 3" x 7/8"	0.89
R55-604	MP-4E	4" x 4" x 7/8"	1.29

## New Fire Barrier Sealant

- Intumescent — expands to seal cavities
- Meets UL approvals
- 10.1 oz.



3M

# 10<sup>49</sup>

G80-321  
Mfg. #CP 25WB+

## New Teflon® Tape

- Provides absolute seal on any pipe or fitting
- 1/2" x 520"



# 39¢

G31-171

## Mini-Split Condensate Pumps

- Fully automatic: start, stop and overflow detection
- Pump can be placed inside air handler or up to 3' above in a false ceiling
- Includes 3' of tubing between pump and reservoir



LittleGIANT

# 84<sup>99</sup>

B82-022

Order #	Mfg. #	Volts	Shutoff	Price
B82-022	EC-400	115	40'	84.99
B82-035	EC-400	230	40'	84.99

# Heat Pumps

13 To 18 SEER, Single-Phase,  
1-1/2 To 5 Ton, R410A

- We offer the most complete product line of heat pumps. Choose from 13, 14, 16 and 18 SEER units to meet your customer requirements
- Factory-installed, bi-flow liquid line filter drier
- 5 mm SmartCoil™ condenser coil in select models
- DSZC series are ComfortNet™ communication systems compatible
- 10 year parts limited warranty



HVAC Equipment



Order #	Mfg. #	Nom. Tons	HSPF	Min. Circuit Amps	Max. Fuse Size
<b>13 SEER</b>					
B98-443	GSZ130181	1-1/2	8.4	12.3	20
B98-444	GSZ130241	2	8.2	17.1	25
B98-445	GSZ130301	2-1/2	8.2	18.7	30
B98-446	GSZ130361	3	8.5	22.4	35
B98-447	GSZ130421	3-1/2	8.2	23.9	40
B98-448	GSZ130481	4	8.4	26.3	45
B98-449	GSZ130601	5	8.6	34.5	60

Order #	Mfg. #	Nom. Tons	HSPF	Min. Circuit Amps	Max. Fuse Size
<b>14 SEER</b>					
B72-606	◀ GSZ140181	1-1/2	8.6	11.8	20
B72-607	◀ GSZ140241	2	8.6	17.1	25
B72-608	◀ GSZ140301	2-1/2	8.6	18.7	30
B72-609	◀ GSZ140361	3	9.0	22.4	30
B72-610	◀ GSZ140421	3-1/2	9.0	24	40
B72-611	◀ GSZ140481	4	9.0	26.4	40
B72-612	◀ GSZ140601	5	9.0	34.6	60



Order #	Mfg. #	Nom. Tons	HSPF	Min. Circuit Amps	Max. Fuse Size
<b>16 SEER</b>					
B91-224	DSZC160241	2	9.1	13.9	20
B91-225	DSZC160361	3	9.3	21.9	30
B91-226	DSZC160481	4	9.0	27.5	45
B91-227	DSZC160601	5	9.0	33.0	50



Order #	Mfg. #	Nom. Tons	HSPF	Min. Circuit Amps	Max. Fuse Size
<b>18 SEER</b>					
B91-228	DSZC180361	3	9.0	23.7	40
B91-229	DSZC180481	4	9.0	29.3	50
B91-230	DSZC180601	5	9.0	34.8	60

## High-Efficiency Retrofit Media Air Cleaners

- Designed to remove air contaminants down to 0.3 microns
- MERV-11



**92<sup>34</sup>**

Order #	Mfg. #	Duct Size	CFM	Price
B82-840	GMU1620	16" X 20"	1,200 CFM	<b>92.34</b>
B82-841	GMU1625	16" X 25"	1,400 CFM	<b>92.34</b>
B82-842	GMU2020	20" X 20"	1,400 CFM	<b>106.77</b>
B82-843	GMU2025	20" X 25"	2,000 CFM	<b>106.77</b>



## Touchscreen Digital Thermostat

- Dual fuel operation
- Programmable or non-programmable
- Auto changeover option
- 24 VAC
- System Application: Heat/Cool/Heat Pumps
- Stages Heat/Cool: 4/2
- Power Method: Hardwired

**166<sup>65</sup>**

L46-028  
Mfg. #TSTATG4271GT





## New Room Air Conditioner



- Insulated cabinets help avoid condensation and provide quiet operation
- Easy access, cleanable filters, electronic controls, LCDI cord
- Type: Cooling Only
- Volts: 230/208
- BtuH Cooling: 18,200



# 469<sup>00</sup>

B72-508  
Mfg. #PS-91B



## Window AC Support Bracket



- Weather resistant components
- Bubble level ensures proper angle installation
- Holds up to 80 lbs



# 41<sup>99</sup>

B81-666  
Mfg. #AS160

## Thru-The-Wall Air Conditioner Uni-Fit Series



FRIEDRICH  
1883

- Efficient and quiet rotary compressor
- Stale air exhaust
- 4-way airflow control
- Installs flush with exterior wall
- Type: Heat/Cool
- Volts: 230/208
- BtuH Cooling: 10,000/9,800



# 499<sup>00</sup>

B90-965  
Mfg. #UE10C33

## Wall Sleeve

- For Friedrich thru-the-wall units



FRIEDRICH  
1883

# 99<sup>99</sup>

B82-541  
Mfg. #USC

## Thru-The-Wall Unit Heat Pump



FRIEDRICH  
1883

- Ultra-quiet operation
- Three fan speeds
- Exact fit for Fedders sleeves
- MoneySaver<sup>®</sup> setting turns fan on and off with the compressor
- Type: Cooling Only
- Volts: 115
- BtuH Cooling: 9,700



# 599<sup>00</sup>

B90-955  
Mfg. #WS10C10



WallMaster<sup>®</sup>

## Thru-The-Wall Air Conditioner



- No louvers on side
- Includes AFCI power cord
- Easily adapted to existing sleeves by other manufacturers
- Type: Cool
- Volts: 115
- BtuH Cooling: 9,800



# 399<sup>00</sup>

B90-466  
Mfg. #BG-101G

## Wall Sleeve

- For use with Comfort-Aire thru-the-wall air conditioners



# 89<sup>99</sup>

B84-164  
Mfg. #EA448F

## Room Air Conditioner Kühl Model Series



FRIEDRICH  
1883

- Commercial grade durability
- Energy saving 7-day programmable thermostat
- Terminals for optional wired remote thermostat
- Type: Heat/Cool
- Volts: 230/208
- BtuH Cooling: 14,500/14,300




# 769<sup>00</sup>

B90-950  
Mfg. #ES15M33

## Window Mounting Kit

- For use with ES, YS chasis
- 28-12" x 20-3/4" x 2"



FRIEDRICH  
1883

# 39<sup>99</sup>

B85-674  
Mfg. #KWKIS

## Portable Air Conditioner



FRIEDRICH  
1883

- Self evaporating condensate system and auto shutoff
- Plugs into standard 115V outlet
- Exhaust dual hoses and window kit included to fit horizontal/vertical window openings from 26" to 46"
- BtuH Cooling: 11,500
- EER: 8.9
- Air Delivery CFM: 235



# 499<sup>00</sup>

B98-657  
Mfg. #P12B

## Wall-Mounted Solution

Solair is North America's leading brand of replacement packaged vertical units or wall-mounts. By specializing in designs for the replacement market Solair is able to offer direct replacement systems for 97% of all installed VPU's (Vertical Packaged Units) regardless of the original brand.



## Packaged Thru-The-Wall



- Only 3 holes are visible from exterior wall for intake, exhaust and condensate
- Installation of unit can be done from the inside of the building
- ECM blower motor
- Low ambient heating operation from 5°F to 125.6°F
- Ideal for hotels, motels, historic buildings and apartments
- Multiple units can be connected to a data network for guest room control
- Type: Heat Pump
- BtuH Cooling: 9,300
- BtuH Heating: 9,300

## Wall-Mounted Fan Coil

- 4-pipe system configuration
- Direct-drive, 115V, 3-speed motor
- Chilled or hot water coil only
- Right-hand coil connection with SWT connectors
- Manual air-vents on water coils
- Insulated condensate drain pan
- Nom. Tons: 1
- Nom. CFM: 400
- Rows: 3/1



B95-726  
Mfg. #M4

B72-725  
Mfg. #RPHE-093G



## Ductless Mini-Split System Multi-Zone Heat Pump



- LCD wireless remote controls
- Auto restart
- 208-230V
- Sold as complete indoor/outdoor system ONLY
- Indoor temperature display
- Airflow direction control
- 24-hour on/off timer
- Jet cool mode



B72-353



B72-354

## Portable Convenience



- The versatile TOPAZ® Portable Air Conditioner cools quietly, effectively and efficiently
- Available from 1-5 tons
- Convenient, single unit design
- Industrial-grade casters for easy portability
- Quick and easy installation



## Room Air Conditioner



FRIEDRICH  
1883

- 3 cooling and fan-only speeds
- Expandable side curtains included
- Stale air exhaust vent
- Easy to lift out, washable, antimicrobial filter
- Type: Cooling Only
- Volts: 115
- BtuH Cooling: 14,700

**479<sup>00</sup>**

B90-983  
Mfg. #CP15F10



Order #	Mfg. #	Unit Type	SEER	BtuH Cooling	Price
B72-353	B-VMH18SC	Indoor	17	17,500	299.00
B72-354	A-VMH18SC	Outdoor	17	17,500	749.00



LEARN MORE AT  
energystar.gov

## Prices Valid August 1–31, 2011 at Participating Johnstone Supply Stores

Prices subject to change. Contact your local Johnstone Supply location. Johnstone Supply is committed to illustrate and describe all the products in this flyer accurately. Such descriptions and illustrations are for the purpose of identification, and do not imply that the products will conform to the descriptions or illustrations. Copyright © 2011 Johnstone Supply, Inc. Marca Registrada. All rights reserved, no part of this mailer or its inserts may be reproduced in any form without written permission from Johnstone Supply, Inc.

### IR Thermometer

- Precision laser targeting
- Distance to Spot Ratio: 10:1
- Temp. Range: -31°F to +689°F

**24<sup>99</sup>**

**H27-100**  
Mfg. #UTLIR2



### Totally Enclosed Condenser Fan Motor

- 48 frame, 1 speed, 1075 RPM, all-angle mounting
- Diam.: 5-5/8"
- HP: 1/4
- Volts: 208-230

**59<sup>79</sup>**

**S88-710**  
Mfg. #FSE1026SV1



### Pro-Treat Pan Tabs

- Removes sludge; kills odors
- 100% soluble
- 100 tablets



**18<sup>99</sup>**

**B11-945**  
Mfg. #PT-151

### Wire Stripper

- For cutting, stripping and looping wire
- Strips 10 to 18 AWG solid wire



**9<sup>99</sup>**

**H25-935**  
Mfg. #11045